

Valve Position Indication

Model: M-VIP

This Valve Position Switch complete with visual puck is designed to fit 1/4 turn namur actuators of all sizes. The housing is made from PBT Engineered resin and contains 2 x Normally Open (SPST) Contacts with a maximum switching capacity of 1.6A at 24V AC/DC. These volt free contacts can be used for switching multiple voltages in AC or DC.




Properties

Body Material	Engineered Resin
Connection Type	PVC Cable - 3 Core (Supplied with 2 metres)
Contacts/Output	2 x Normally Open/SPST
Contact Material	Rhodium (Tungsten Optional)
Dimensions	50 x 45 x 25mm
Visual Indicator	Rotating Puck
Environmental Protection	IP 66, 67, 68
Operating Temperature	-20°C to +80°C


Ratings

Supply Voltage	Maximum Switching Current	Maximum Voltage	Maximum Switching Power
24 VAC/DC 110 VAC 230 VAC	1.6A 360mA 170mA	250 VAC/DC	40W VA

Dimensions

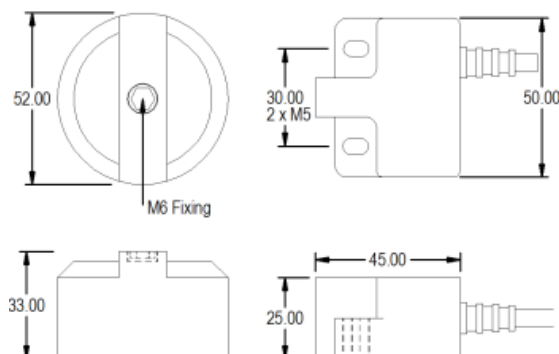

Connections

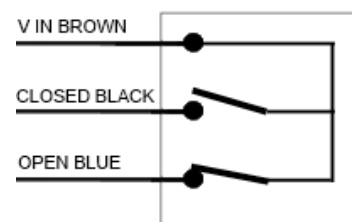

Certifications and Approvals

Certification	Compliance	Certificate No.
Simple Apparatus	N/A	N/A