

Valve Position Indication

Model: MI-VIP-4

ATEX/IECEx Ex ia IIC Valve Position Switch T6 Certified for use in Zone 0, 1, 2 and Zone 20, 21, 22 Atmospheres

This Valve Position Switch complete with visual puck is designed to fit 1/4 turn namur actuators of all sizes. The housing is made from PBT Engineered resin and contains 2 x Normally Open (SPST) Volt Free Contacts designed and approved for use in intrinsically safe circuits.




Properties

Body Material	Engineered Resin
Connection Type	PVC Cable - 4 Core (Supplied with 2 metres)
Contacts/Output	2 x Normally Open/SPST
Contact Material	Rhodium (Tungsten Optional)
Dimensions	50 x 45 x 25mm
Visual Indicator	Rotating Puck
Environmental Protection	IP 66, 67, 68
Operating Temperature	-20°C to +50°C


Ratings

<i>U_i</i>	<i>I_i</i>	<i>P_i</i>
30V	250mA	1.3W

Dimensions

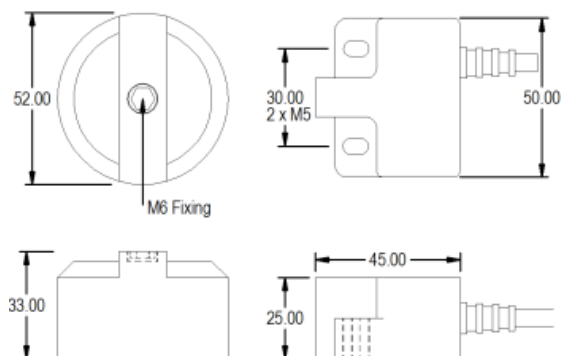

Connections

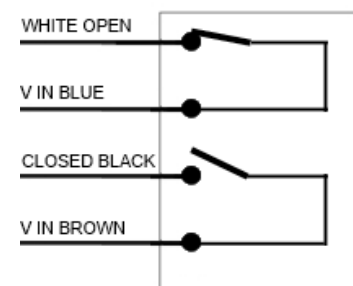

Certifications and Approvals

Certification	Compliance	Certificate No.
ATEX Ex ia IIC T6 IECEx Ex ia IIC T6	EN 60079-0: 2012 + A11: 2013, EN 60079-11: 2012 IEC 60079-0: 2011, IEC 60079-11: 2011	Baseefa14ATEX0013X IECEx BAS 14.0003X